




AC 4E / 4E Laser welding

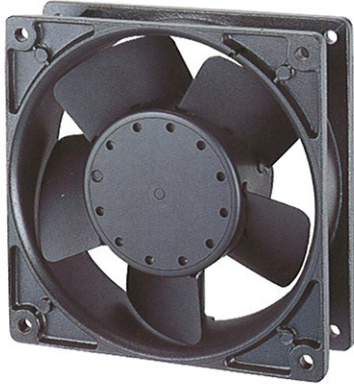

SIZE :

119x119x38mm (4.69"x4.69"x1.50")

CONSTRUCTION :

- Die-cast aluminum housing
- Metal impeller
- Shaded pole motor
- Impedance protected
- Leader wire or Terminal is available

OPERATING TEMPERATURE :

Ball bearing - 30°C to +75°C

Sleeve bearing - 10°C to +70°C

WEIGHT :

600 grams Specifications are subject to change without notice

Specifications

MODEL NO.	BEARING	RATED VOLTAGE	FREQUENCY	MAX. RATED CURRENT	MAX. INPUT POWER	SPEED	MAX. AIR FLOW		MAX. AIR PRESSURE		NOISE
		VAC	Hz	mA	W	R.P.M.	m ³ /min	CFM	mmH ₂ O	IN H ₂ O	
4E-115B-17	Ball	115	50/60	210/200	21/19	1600/1700	1.5/1.7	52.3/58.4	2.4/2.7	0.1/0.1	25/30
4E-115S-17	Sleeve										
4E-230B-17	Ball	230	50/60	120/110	19/18	1600/1700	1.5/1.7	52.3/58.4	2.4/2.7	0.1/0.1	25/30
4E-230S-17	Sleeve										
4E-115B-21	Ball	115	50/60	230/220	22/20	1800/2100	1.7/1.8	60/65	5.2/6.1	0.2/0.2	36/38
4E-115S-21	Sleeve										
4E-230B-21	Ball	230	50/60	130/120	20/19	1800/2100	1.7/1.8	60/65	5.2/6.1	0.2/0.2	36/38
4E-230S-21	Sleeve										
4E-115B-25	Ball	115	50/60	240/230	23/21	2250/2500	2.0/2.2	70/78	6.5/7.3	0.3/0.3	38/42
4E-230B-25	Ball										
4E-230S-25	Sleeve	230	50/60	130/120	21/20	2250/2500	2.0/2.2	70/78	6.5/7.3	0.3/0.3	38/42
4E-240B-25	Ball										
4E-115HB	Ball	115	50/60	250/240	24/22	2650/3000	2.2/2.5	77.5/89	6.0/6.0	0.24/0.24	42/46
4E-115HS	Sleeve										
4E-230HB	Ball	230	50/60	140/130	22/21	2650/3000	2.2/2.5	77.5/89	6.0/6.0	0.24/0.24	42/46
4E-230HS	Sleeve										
4E-DVB	Ball	115/230	50/60	250/130	21/22	2650/3000	2.2/2.5	77.5/89	6.0/6.0	0.24/0.24	42/46
4E-DVS	Sleeve										
4E-DVB-1	Ball	100/200	50/60	200/120	20/24	2500/2800	2.1/2.3	73/81	5.3/5.0	0.2/0.2	37/41
	Sleeve										

