



Bi-Sonic

DC 12032



SIZE:

120mm×120mm×32mm(4.72"×4.72"×1.26")

CONSTRUCTION:

Glass fiber reinforced plastic: Impeller and housing PBT are UL 94V-0 rating

DIELECTRIC STRENGTH:

5mA max. at 500VAC 60Hz one minute (between frame and terminal)

INSULATION RESISTANCE

10mega Ohm min.at 500 VDC (between frame and terminal)

OPERATING TEMPERATURE:

Ball bearing: -10°C to +75°C

FUNCTION(Optional):

Polarity Protection/Auto Restart/ FG/PWM/IP68


WEIGHT:

240 grams

Specifications:

MODEL NO.	BEARING	RATED	OPERATING	MAX.	MAX.	SPEED	MAX. AIR FLOW		MAX. AIR PRESSURE		NOISE
		VOLTAGE	VOLTAGE RANGE	CURRENT	INPUT POWER		m3/min	CFM	mmH2O	inH2O	
		VDC	V	A	W	R.P.M.					
BP1203212H	Ball	12	7~13.8	1.00	12.00	2650	0.68	24.0	22.1	0.870	46.7

Dimensions (mm)

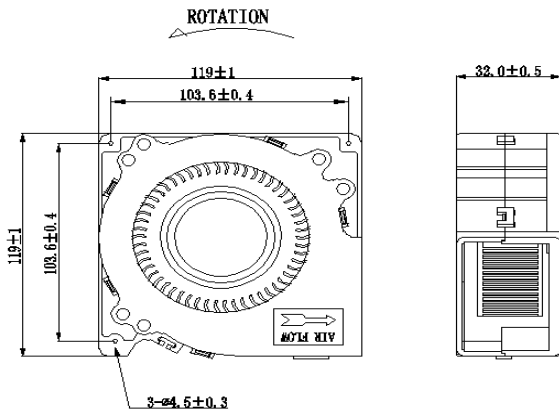

Performance Curve

