



Bi-Sonic



## DC 6015 new

**SIZE:**

60mm×60mm×15mm(2.36"×2.36"×0.59")

**CONSTRUCTION:**

Glass fiber reinforced plastic: Impeller and housing PBT are UL 94V-0 rating

**DIELECTRIC STRENGTH:**

5mA max. at 500VAC 60Hz one minute (between frame and terminal)

**INSULATION RESISTANCE**

10mega Ohm min.at 500 VDC (between frame and terminal)

**OPERATING TEMPERATURE:**

Ball bearing: -10°C to +75°C

**FUNCTION(Optional):**

Polarity Protection/Auto Restart/ FG or RD/PWM/IP68


**WEIGHT:**

34 grams

## Specifications:

MODEL NO.	BEARING	RATED	OPERATING	MAX.	MAX.	SPEED	MAX. AIR FLOW		MAX. AIR PRESSURE		NOISE
		VOLTAGE	VOLTAGE RANGE	CURRENT	INPUT POWER		m3/min	CFM	mmH2O	inH2O	
		VDC	V	A	W	R.P.M.					
BP601505H	Ball	5	3~5.75	0.30	1.49	3500	0.091	3.2	6.6	0.26	28.4
BP601512H	Ball	12	7~13.8	0.10	1.20	3000	0.080	2.8	4.9	0.19	28.4
BP601512M	Ball	12	7~13.8	0.18	2.12	4000	0.107	3.8	8.6	0.34	32.9
BP601512H	Ball	12	7~13.8	0.32	3.82	5000	0.138	4.9	5.9	0.23	39.6

Dimensions (mm)

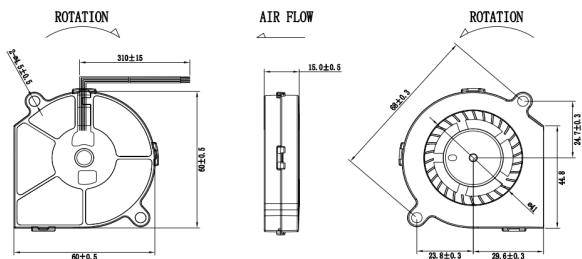

Performance Curve

