




JIB & RMB SERIES

WELCOME FOR OEMs ORDER

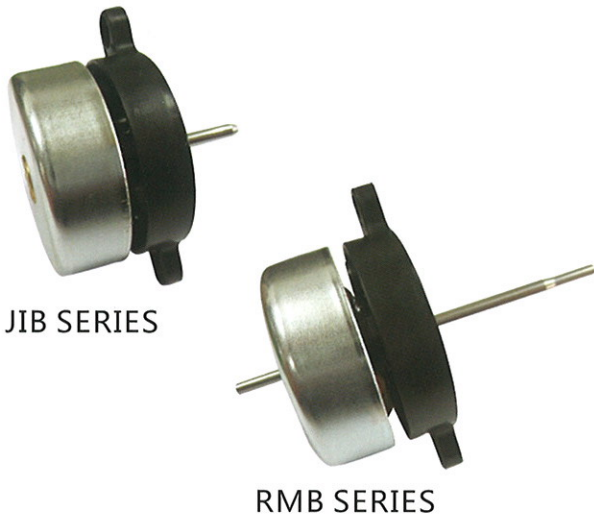

JIB SERIES

RMB SERIES

SIZE:

ø38mmx23mm (ø1.49"x0.90")

CONSTRUCTION :

- Plastic base
- Metal rotor

OPERATING TEMPERATURE :

Ball bearing - 30°C to + 75°C

INSULATION RESISTANCE :

10 meg Ohm min. at 500 VDC
(between frame and terminal)

DIELECTRIC STRENGTH :

5 mA max. at 500 VAC 60Hz one minute
(between frame and terminal)

WEIGHT :

60 grams

Specifications

Specifications are subject to change without notice

MODEL NO.	BEARING	RATED	OPERATING	RATED	RATED INPUT	SPEED
		VOLTAGE	VOLTAGE	CURRENT	POWER	
		VDC	RANGE	A	W	R.P.M.
			V			
JIB0412LL	BALL	12	10.2~13.8	0.11	1.32	4900
JIB0412LM	BALL	12	10.2~13.8	0.12	1.44	5700
JIB0412LH	BALL	12	10.2~13.8	0.14	1.68	6400
JIB0412RL	BALL	12	10.2~13.8	0.11	1.32	4900
JIB0412RM	BALL	12	10.2~13.8	0.12	1.44	5700
JIB0412RH	BALL	12	10.2~13.8	0.14	1.68	6400
JIB0424LL	BALL	24	20.4~27.6	0.10	2.40	4900
JIB0424LM	BALL	24	20.4~27.6	0.12	2.88	5700
JIB0424LH	BALL	24	20.4~27.6	0.10	2.40	6200
JIB0424RL	BALL	24	20.4~27.6	0.10	2.40	4900
JIB0424RM	BALL	24	20.4~27.6	0.12	2.88	5700
JIB0424RH	BALL	24	20.4~27.6	0.13	3.12	6400
RMB0112B	BALL	12	10.2~13.8	0.08	0.96	4000

